



Brussels Dimensional Stone[®]

1-800-UNILOCK | UNILOCK.COM

UNILOCK
PAVERS & WALLS

BRUSSELS DIMENSIONAL STONE® CLASSIC



DESERT SAND



LIMESTONE



MAHOGANY ASH



MIDNIGHT CHARCOAL



SANDSTONE



SIERRA

PRODUCT ATTRIBUTES

Visual Appearance	The antiqued appearance of Brussels Dimensional Stone is great for gardens and seat walls.
Finish	Weathered, antiqued, tumbled.

PRODUCT SPECIFICATIONS




STANDARD
12 x 4 x 8"
300 x 100 x 200mm



U-GRIP™ BASE PAD
14 X 19 x 2"
355 x 482 x 55mm


CROSS SECTIONS

GRAVITY WALL SECTION

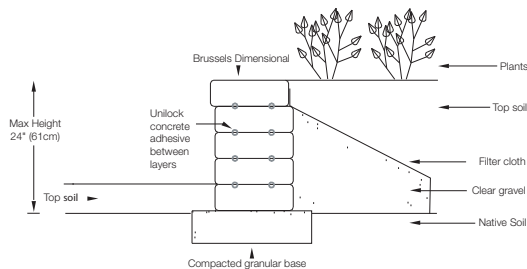

Cross sections are examples and must not be used for construction.

FRONT ELEVATION

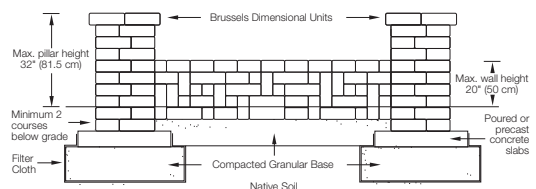

All joints must be adhered with Unilock approved Concrete Adhesive. Base preparation may vary according to soil and climate conditions. Cross sections are examples, and must not be used for construction.

RECOMMENDED ADHESIVE



Gator Block Bond XP

- | VOC Compliant
- | Low odor- safe indoors or out
- | Fast curing- provides permanent overnight bond
- | Suitable for use in hot and cold environments
- | Non-shrinking- does not crack
- | Strong and versatile

Coverage: For 1/4" Bead (approx)

10 oz		28 oz	
m	ft.	m	ft.
-9	-31	-26	-86

SUNSET FIREPIT KITS

AVAILABLE COLOURS: Desert Sand, Mahogany Ash and Sandstone (see page 171)

Round



Square



TECHNICAL INFORMATION

ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units

Conforms to:

- C140 for Absorption 5% avg - 7% max
- Compressive Strength > 3,000 PSI
- C1262 for Freeze Thaw Durability < 1% mass loss
- C1372 Overall dimensional variations permissible for width, height and length **+/- 3mm**

Unilock standards exceed 6,000 PSI for Brussels Dimensional Stone® products with:

- 4% absorption avg.
- 5% absorption max.
- Dimensional Accuracy +/- 5/64" (+/-2.00mm)

Test results available upon request

Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines

PRODUCT DATA

Stones & Bundling	Face Feet Per		Unit	Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Layer		Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Ayr Manufacturing											
Standard	32.00	0.33	0.33	96.00	1.000	96		6	4	30	2,881
U-GRIP Base Pad Gormley Manufacturing	99.46	1.84		85.39	1.581	54		9		46	2,500

Notes: Product is installed using Unilock Concrete Adhesive to secure corners and all rows. Maximum height is 24" including the unit in the ground (under optimum conditions). All measurements are nominal. *Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. Brussels Dimensional Stone™ XL, Brussels Fullnose™ or Ledgestone™ complement as a possible coping unit. Contact your Unilock Territory Manager or call 1-800-UNILOCK for further information. *For custom options, please contact your Unilock Territory Manager.

APPLICATIONS



Garden Walls & Seat Walls



Fire Features



Water Features



Grill Islands



Pillars

Coping Options - We recommend using Ledgestone™, Natural Stone, Universal Coping, Brussels Fullnose™ or Umbriano® Coping.

*Things to know:

Handling and Installation - Product is installed using Unilock Concrete Adhesive to secure corners and all rows. Base preparation may vary according to soil and climate conditions. Maximum height is 24" including the unit in the ground (under optimum conditions). Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle.